

TEST RESULTS

Table 4. Test Environmental and Operating Conditions

Ambient Temperature (°C)	25.6
Voltage (V)	229.1
Current (mA)	924.00
Frequency (Hz)	50.0
Power (W)	206.5
Power Factor	0.97

Table 5. Beam Angle Results

Luminous Flux of Luminaire (lm)	Luminous Efficacy (lm/W)	Peak Beam Intensity (cd)	Beam Angle (Lamp orientation)	Beam Angle Result (°)
5624.2	27.23	21473.99	Horizontal	3.5
			Vertical	3.5

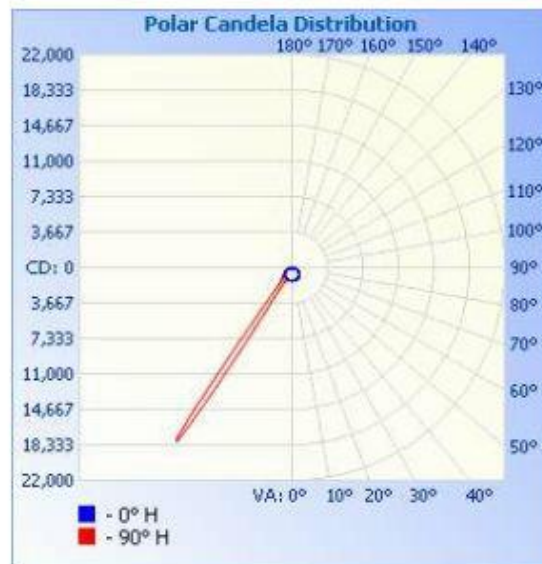


Figure 1. Polar Diagram

Continued on following page

CONE DIAGRAM

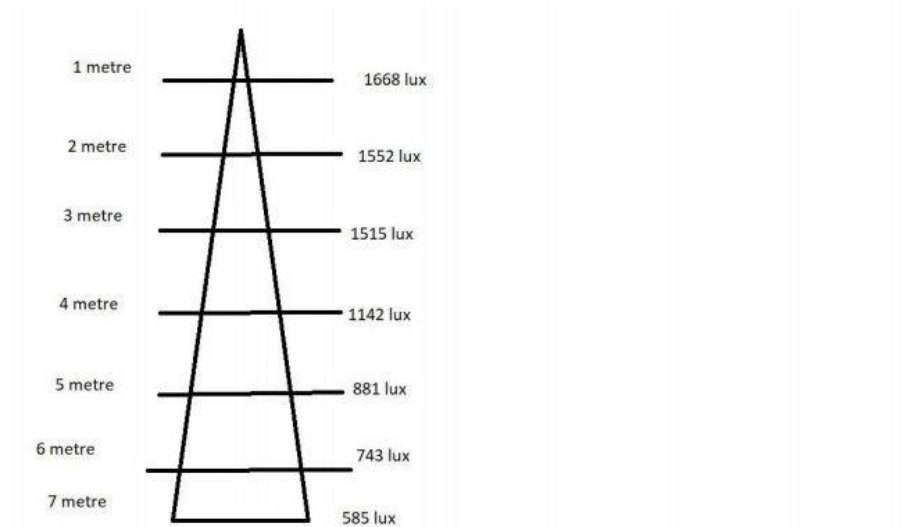


Figure 2. Cone diagram for mounting height up to 8 metres. Based on peak beam intensity @ 30 degrees.

Continued on following page